

NoIR



P.O. Box 159 South Lyon Michigan 48178
Phone: 1.800.521.9746 734.769.5565 Fax:734.769.1708
www.noirlaser.com

Product Specification LaserShield FG1

Customer:	Varied
Product Designation (OPN):	FG1
Luminous Transmittance:	75%
Date of Revision:	05/12/11
Edited by:	David W. Bothner

Graphs represent nominal filter characteristics

<u>L-Rating</u>	<u>Optical Density</u>
950-1000 DIR LB5	850-5200nm 3+
>1000-1063 DIR LB6	945-2300nm 5+
>1063-1400 D LB6 + IR LB7	2300-2500nm 4+
>1400-2500 DIR LB4	2800-10600nm 5+
2900-3200 + 10600 DI LB4	1010-1500nm 7+

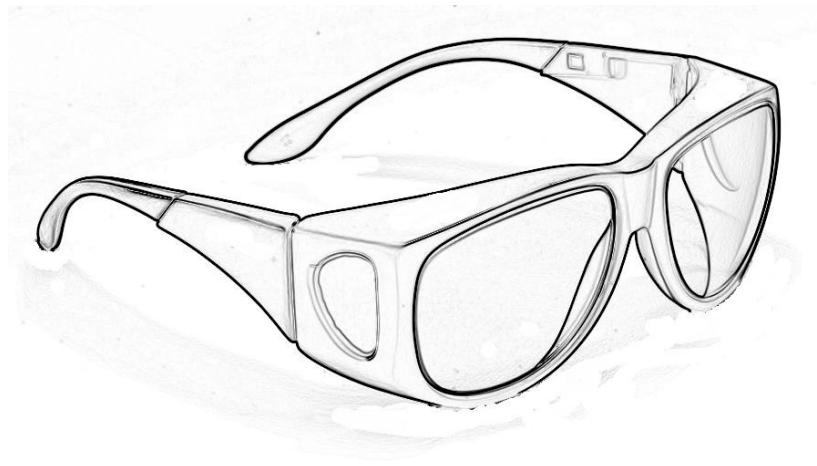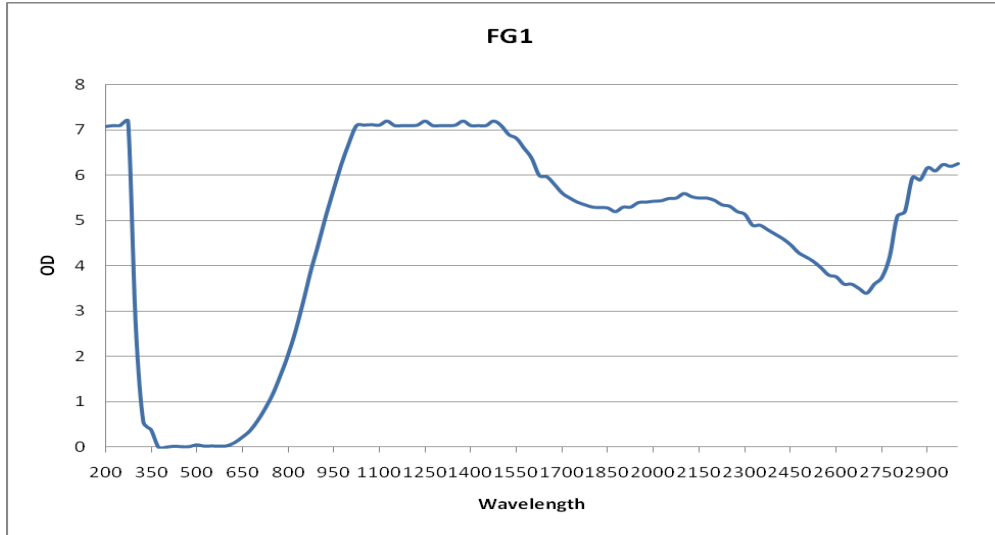

Other Laser Safety Eyewear available at www.lasereyeprotection.com.
All LaserShield frames carry a lifetime warranty.