

NoIR

P.O. Box 159 South Lyon Michigan 48178
 Phone: 1.800.521.9746 734.769.5565 Fax:734.769.1708
www.noirlaser.com


Product Specification LaserShield ML1

Customer:	Varied
Product Designation (OPN):	ML1
Luminous Transmittance:	49%
Date of Revision:	5/12/11
Edited by:	David W. Bothner

Graphs represent nominal filter characteristics

L-Rating
190-315 D LB8 + IR LB4
>315-400 + 790-840 + 950-1070 DIR LB5
800-820 + 970-990 D LB5 + IR LB6

Optical Density
190-400nm 5+
790-840nm 5+
950-1070nm 5+
800-820nm 6+
970-990nm 6+

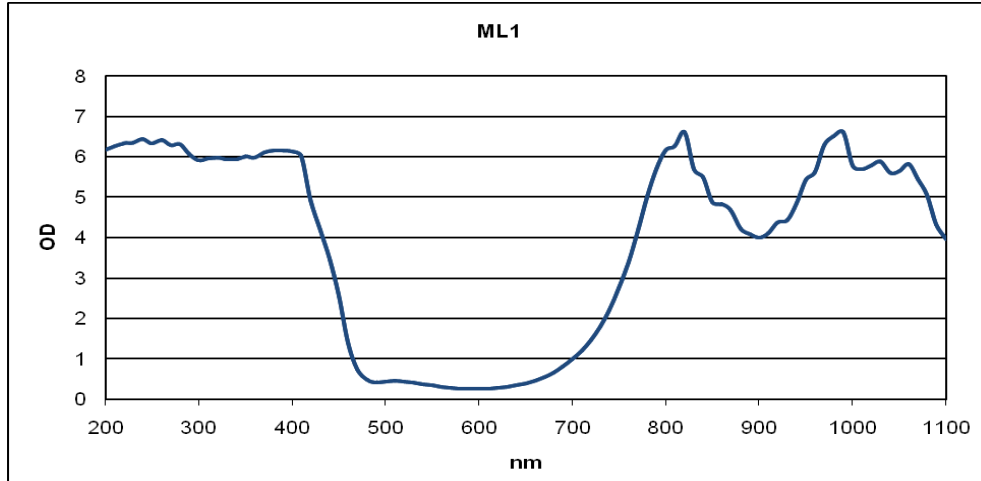


#35 Wrap-Around




#39 Large Fitover or #31 Small Fitover



#33 Universal



#34 Wrap with Rx Insert

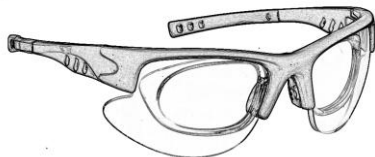

#38 Large Adjustable



#36 Universal Adjustable



Other frame styles available at www.lasereyeprotection.com.
 All LaserShield frames carry a lifetime warranty.